



## L type collar ring

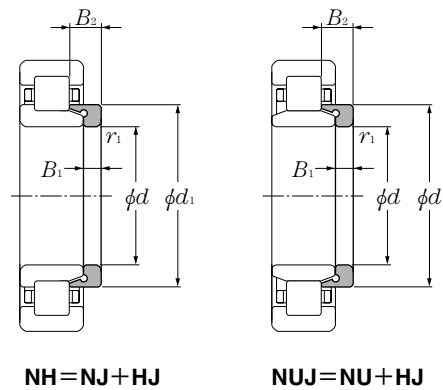

$d$  20 ~ 60mm

Dimensions						Bearing numbers	Mass kg (approx.)	Dimensions						Bearing numbers	Mass kg (approx.)
mm					mm										
$d$	$d_1$	$B_1$	$B_2$	$r_{1s \min}^{1)}$				$d$	$d_1$	$B_1$	$B_2$	$r_{1s \min}^{1)}$			
20	29.9	3	6.75	0.6	HJ204	0.012	40	54.2	5	9	1.1	HJ208	0.046		
	29.5	3	5.5	0.6	HJ204E	0.009		53.9	5	8.5	1.1	HJ208E	0.042		
	29.9	3	7.5	0.6	HJ2204	0.013		54.2	5	9.5	1.1	HJ2208	0.047		
	29.5	3	6.5	0.6	HJ2204E	0.01		53.9	5	9	1.1	HJ2208E	0.045		
	31.8	4	7.5	0.6	HJ304	0.017		58.4	7	12.5	1.5	HJ308	0.083		
	31.1	4	6.5	0.6	HJ304E	0.014		57.6	7	11	1.5	HJ308E	0.07		
	31.8	4	8.5	0.6	HJ2304	0.018		58.4	7	14.5	1.5	HJ2308	0.09		
31.1	4	7.5	0.6	HJ2304E	0.015	57.6	7	12.5	1.5	HJ2308E	0.08				
25	34.8	3	7.25	0.6	HJ205	0.015	45	59	5	9.5	1.1	* HJ209	0.053		
	34.5	3	6	0.6	HJ205E	0.012		58.9	5	8.5	1.1	HJ209E	0.047		
	34.8	3	7.5	0.6	HJ2205	0.015		58.9	5	9	1.1	HJ2209E	0.05		
	34.5	3	6.5	0.6	HJ2205E	0.013		64	7	12.5	1.5	HJ309	0.099		
	39	4	8	1.1	HJ305	0.025		64.5	7	11.5	1.5	HJ309E	0.093		
	38	4	7	1.1	HJ305E	0.021		64	7	15	1.5	HJ2309	0.109		
	39	4	9	1.1	HJ2305	0.027		64.5	7	13	1.5	HJ2309E	0.103		
	38	4	8	1.1	HJ2305E	0.024		71.8	8	13.5	2	HJ409	0.175		
43.6	6	10.5	1.5	HJ405	0.057	50	64.6	5	10	1.1	HJ210	0.063			
41.7	4	8.25	0.6	HJ206	0.025		63.9	5	9	1.1	* HJ210E	0.055			
41.1	4	7	0.6	HJ206E	0.017		64.6	5	9.5	1.1	HJ2210	0.061			
41.7	4	8.5	0.6	HJ2206	0.025		71	8	14	2	HJ310	0.142			
41.1	4	7.5	0.6	HJ2206E	0.02		71.4	8	13	2	HJ310E	0.134			
45.9	5	9.5	1.1	HJ306	0.039		71	8	17	2	HJ2310	0.157			
44.9	5	8.5	1.1	HJ306E	0.035		71.4	8	14.5	2	HJ2310E	0.15			
45.9	5	11.5	1.1	HJ2306	0.043		78.8	9	14.5	2.1	HJ410	0.23			
44.9	5	9.5	1.1	HJ2306E	0.035	55	70.8	6	11	1.1	* HJ211	0.084			
50.5	7	11.5	1.5	HJ406	0.08		70.8	6	9.5	1.1	HJ211E	0.072			
30	41.7	4	8.25	0.6	HJ206		0.025	70.8	6	10	1.1	HJ2211E	0.076		
	41.1	4	7	0.6	HJ206E		0.017	77.2	9	15	2	HJ311	0.182		
	41.7	4	8.5	0.6	HJ2206		0.025	77.7	9	14	2	HJ311E	0.168		
	41.1	4	7.5	0.6	HJ2206E		0.02	77.2	9	18.5	2	HJ2311	0.203		
	45.9	5	9.5	1.1	HJ306		0.039	77.7	9	15.5	2	HJ2311E	0.185		
	44.9	5	8.5	1.1	HJ306E		0.035	85.2	10	16.5	2.1	HJ411	0.29		
	45.9	5	11.5	1.1	HJ2306	0.043	60	78.4	6	11	1.5	* HJ212	0.108		
44.9	5	9.5	1.1	HJ2306E	0.035	77.6		6	10	1.5	* HJ212E	0.094			
50.5	7	11.5	1.5	HJ406	0.08	35	47.6	4	8	0.6	HJ207	0.03			
35	47.6	4	8	0.6	HJ207E		0.027	48	4	7	0.6	HJ207E	0.027		
	47.6	4	8.5	0.6	HJ2207		0.031	47.6	4	8.5	0.6	HJ2207	0.031		
	48	4	8.5	0.6	HJ2207E		0.031	48	4	8.5	0.6	HJ2207E	0.031		
	50.8	6	11	1.1	HJ307		0.056	50.8	6	11	1.1	HJ307	0.056		
	51	6	9.5	1.1	HJ307E		0.048	51	6	9.5	1.1	HJ307E	0.048		
	50.8	6	14	1.1	HJ2307		0.064	50.8	6	14	1.1	HJ2307	0.064		
	51	6	11	1.1	HJ2307E	0.055	51	6	11	1.1	HJ2307E	0.055			
59	8	13	1.5	HJ407	0.12	59	8	13	1.5	HJ407	0.12				

1) Minimal allowable dimension for chamfer dimension  $r$ . Note: 1. This L type collar ring is used with **NU** type cylindrical roller bearings; in duplex arrangements with **NJ** or **NU** type bearing numbers, they become **NH** type and **NUJ** type respectively. For bearing dimensions, allowable rotations, and mass, please refer to pages **B-80** to **B-84**. 2. "\*" indicates L type collar rings that can also be used with dimension series **22** bearings.

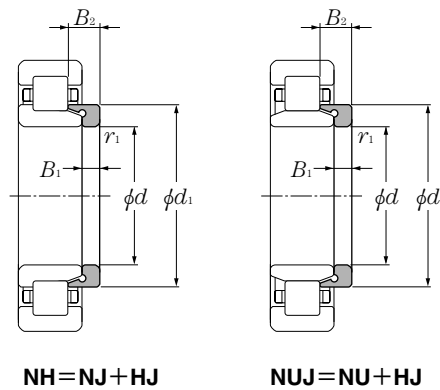

## d 60 ~ 105mm

Dimensions					Bearing numbers	Mass kg (approx.)
mm						
d	d <sub>1</sub>	B <sub>1</sub>	B <sub>2</sub>	r <sub>1s min</sub> <sup>1)</sup>		


<b>60</b>	84.2	9	15.5	2.1	<b>HJ312</b>	0.22
	84.6	9	14.5	2.1	<b>HJ312E</b>	0.205
	84.2	9	19	2.1	<b>HJ2312</b>	0.245
	84.6	9	16	2.1	<b>HJ2312E</b>	0.23
	91.8	10	16.5	2.1	<b>HJ412</b>	0.34
<b>65</b>	84.8	6	11	1.5	<b>HJ213</b>	0.123
	84.5	6	10	1.5	<b>HJ213E</b>	0.111
	84.8	6	11.5	1.5	<b>HJ2213</b>	0.126
	84.5	6	10.5	1.5	<b>HJ2213E</b>	0.118
	91	10	17	2.1	<b>HJ313</b>	0.28
	91	10	15.5	2.1	<b>HJ313E</b>	0.25
	91	10	20	2.1	<b>HJ2313</b>	0.304
	91	10	18	2.1	<b>HJ2313E</b>	0.29
<b>70</b>	89.6	7	12.5	1.5	* <b>HJ214</b>	0.15
	89.5	7	11	1.5	<b>HJ214E</b>	0.13
	89.5	7	11.5	1.5	<b>HJ2214E</b>	0.138
	98	10	17.5	2.1	<b>HJ314</b>	0.33
	98	10	15.5	2.1	<b>HJ314E</b>	0.293
	98	10	20.5	2.1	<b>HJ2314</b>	0.358
	98	10	18.5	2.1	<b>HJ2314E</b>	0.35
<b>75</b>	110.5	12	20	3	<b>HJ414</b>	0.605
	94	7	12.5	1.5	* <b>HJ215</b>	0.156
	94.5	7	11	1.5	<b>HJ215E</b>	0.141
	94.5	7	11.5	1.5	<b>HJ2215E</b>	0.164
	104.2	11	18.5	2.1	<b>HJ315</b>	0.4
	104.6	11	16.5	2.1	<b>HJ315E</b>	0.35
	104.2	11	21.5	2.1	<b>HJ2315</b>	0.432
	104.6	11	19.5	2.1	<b>HJ2315E</b>	0.41
<b>80</b>	116.0	13	21.5	3	<b>HJ415</b>	0.71
	101.2	8	13.5	2	* <b>HJ216</b>	0.207
	101.7	8	12.5	2	* <b>HJ216E</b>	0.193
	111.8	11	19.5	2.1	<b>HJ316</b>	0.47
	111	11	17	2.1	<b>HJ316E</b>	0.405

Dimensions					Bearing numbers	Mass kg (approx.)
mm						
d	d <sub>1</sub>	B <sub>1</sub>	B <sub>2</sub>	r <sub>1s min</sub> <sup>1)</sup>		

<b>80</b>	111	11	20	2.1	<b>HJ2316E</b>	0.45
	122	13	22	3	<b>HJ416</b>	0.78
<b>85</b>	108.2	8	14	2	* <b>HJ217</b>	0.25
	107.7	8	12.5	2	<b>HJ217E</b>	0.21
	107.7	8	13	2	<b>HJ2217E</b>	0.216
	117.5	12	20.5	3	<b>HJ317</b>	0.56
	118.4	12	18.5	3	<b>HJ317E</b>	0.505
<b>90</b>	117.5	12	24	3	<b>HJ2317</b>	0.606
	118.4	12	22	3	<b>HJ2317E</b>	0.55
	114.2	9	15	2	<b>HJ218</b>	0.305
	114.6	9	14	2	<b>HJ218E</b>	0.272
	114.2	9	16	2	<b>HJ2218</b>	0.315
	114.6	9	15	2	<b>HJ2218E</b>	0.308
<b>95</b>	125	12	21	3	<b>HJ318</b>	0.63
	124.7	12	18.5	3	<b>HJ318E</b>	0.548
	125	12	26	3	<b>HJ2318</b>	0.704
	124.7	12	22	3	<b>HJ2318E</b>	0.69
	121	9	15.5	2.1	<b>HJ219</b>	0.352
<b>100</b>	121	9	14.0	2.1	<b>HJ219E</b>	0.304
	121	9	16.5	2.1	<b>HJ2219</b>	0.363
	121	9	15.5	2.1	<b>HJ2219E</b>	0.335
	132	13	22.5	3	<b>HJ319</b>	0.76
	132.7	13	20.5	3	<b>HJ319E</b>	0.7
	132	13	26.5	3	<b>HJ2319</b>	0.826
	132.7	13	24.5	3	<b>HJ2319E</b>	0.8
<b>105</b>	128	10	17	2.1	<b>HJ220</b>	0.444
	128	10	15	2.1	<b>HJ220E</b>	0.38
	128	10	18	2.1	<b>HJ2220</b>	0.456
	128	10	16	2.1	<b>HJ2220E</b>	0.385
	140.5	13	22.5	3	<b>HJ320</b>	0.895
	140.3	13	20.5	3	<b>HJ320E</b>	0.8
<b>105</b>	140.5	13	27.5	3	<b>HJ2320</b>	0.986
	140.3	13	23.5	3	<b>HJ2320E</b>	0.92

1) Minimal allowable dimension for chamfer dimension r. Note: 1. This L type collar ring is used with **NU** type cylindrical roller bearings; in duplex arrangements with **NJ** or **NU** type bearing numbers, they become **NH** type and **NUJ** type respectively. For bearing dimensions, allowable rotations, and mass, please refer to pages **B-84** to **B-88**. 2. " \* " indicates L type collar rings that can also be used with dimension series **22** bearings.


## L type collar ring

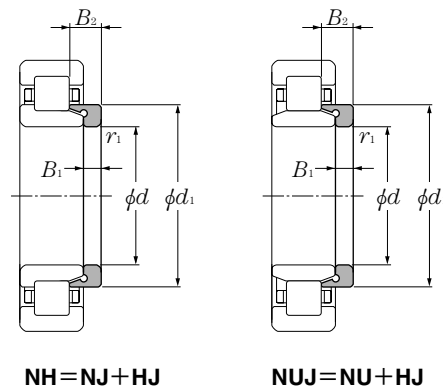

### d 105 ~ 200mm

Dimensions						Bearing numbers	Mass kg (approx.)	Dimensions					Bearing numbers	Mass kg (approx.)
mm					mm									
d	d <sub>1</sub>	B <sub>1</sub>	B <sub>2</sub>	r <sub>1s min</sub> <sup>1)</sup>		d	d <sub>1</sub>	B <sub>1</sub>	B <sub>2</sub>	r <sub>1s min</sub> <sup>1)</sup>				
<b>105</b>	147.0	13	22.5	3	<b>HJ321</b>	0.97	<b>150</b>	194	12	19.5	3	<b>HJ230E</b>	1.18	
	<b>110</b>	141.5	11	18.5	2.1	<b>HJ222</b>		0.615	193	12	26.5	3	<b>HJ2230E</b>	1.39
		142.1	11	17	2.1	<b>HJ222E</b>		0.553	194	12	24.5	3	<b>HJ2230E</b>	1.42
		141.5	11	20.5	2.1	<b>HJ2222</b>		0.645	210	15	26.5	4	<b>HJ330</b>	2.37
		142.1	11	19.5	2.1	<b>HJ2222E</b>		0.605	211	15	25	4	<b>HJ330E</b>	2.25
155.5		14	23	3	<b>HJ322</b>	1.17		210	15	34	4	<b>HJ2330</b>	2.69	
156.6		14	22	3	<b>HJ322E</b>	1.09		211	15	31.5	4	<b>HJ2330E</b>	2.6	
155.5		14	28	3	<b>HJ2322</b>	1.28		<b>160</b>	207	12	21	3	<b>HJ232</b>	1.48
156.6	14	26.5	3	<b>HJ2322E</b>	1.25	207.8			12	20	3	<b>HJ232E</b>	1.34	
<b>120</b>	153	11	19	2.1	<b>HJ224</b>	0.715			207	12	28	3	<b>HJ2232</b>	1.69
	153.9	11	17	2.1	<b>HJ224E</b>	0.634			206.6	12	24.5	3	<b>HJ2232E</b>	1.61
	153	11	22	2.1	<b>HJ2224</b>	0.767			225	15	28	4	<b>HJ332</b>	2.75
	153.9	11	20	2.1	<b>HJ2224E</b>	0.705			223.2	15	25	4	<b>HJ332E</b>	2.4
	168.5	14	23.5	3	<b>HJ324</b>	1.4			225	15	37	4	<b>HJ2332</b>	3.16
	169.2	14	22.5	3	<b>HJ324E</b>	1.28		223.2	15	32	4	<b>HJ2332E</b>	2.85	
	168.5	14	28	3	<b>HJ2324</b>	1.53	<b>170</b>	220.5	12	22	4	<b>HJ234</b>	1.7	
169.2	14	26	3	<b>HJ2324E</b>	1.42	221.4		12	20	4	<b>HJ234E</b>	1.51		
<b>130</b>	165.5	11	19	3	<b>HJ226</b>	0.84		220.5	12	29	4	<b>HJ2234</b>	1.93	
	164.7	11	17	3	<b>HJ226E</b>	0.684		220.2	12	24	4	<b>HJ2234E</b>	1.82	
	165.5	11	25	3	<b>HJ2226</b>	0.953		238	16	29.5	4	<b>HJ334</b>	3.25	
	164.7	11	21	3	<b>HJ2226E</b>	0.831		238	16	38.5	4	<b>HJ2334</b>	3.71	
	182	14	24	4	<b>HJ326</b>	1.62		<b>180</b>	230.5	12	22	4	<b>HJ236</b>	1.8
	183	14	23	4	<b>HJ326E</b>	1.53	231.4		12	20	4	<b>HJ236E</b>	1.7	
	182	14	29.5	4	<b>HJ2326</b>	1.8	230.5		12	29	4	<b>HJ2236</b>	2.04	
183	14	28	4	<b>HJ2326E</b>	1.75	230.2	12		24	4	<b>HJ2236E</b>	1.91		
<b>140</b>	179.5	11	19	3	<b>HJ228</b>	1	252		17	30.5	4	<b>HJ336</b>	3.85	
	180.2	11	18	3	<b>HJ228E</b>	0.929	252		17	40	4	<b>HJ2336</b>	4.42	
	179.5	11	25	3	<b>HJ2228</b>	1.14	<b>190</b>		244.5	13	23.5	4	<b>HJ238</b>	2.2
	180.2	11	23	3	<b>HJ2228E</b>	1.11		245.2	13	21.5	4	<b>HJ238E</b>	1.94	
	196	15	26	4	<b>HJ328</b>	1.93		244.5	13	31.5	4	<b>HJ2238</b>	2.52	
	196.8	15	25	4	<b>HJ328E</b>	1.91		244	13	26.5	4	<b>HJ2238E</b>	2.38	
	196	15	33.5	4	<b>HJ2328</b>	2.21		265	18	32	5	<b>HJ338</b>	4.45	
196.8	15	31	4	<b>HJ2328E</b>	2.3	265		18	41.5	5	<b>HJ2338</b>	5.05		
<b>150</b>	193	12	20.5	3	<b>HJ230</b>	1.24		<b>200</b>	258	14	25	4	<b>HJ240</b>	2.6

1) Minimal allowable dimension for chamfer dimension r. Note: 1. This L type collar ring is used with **NU** type cylindrical roller bearings; in duplex arrangements with **NJ** or **NU** type bearing numbers, they become **NH** type and **NUJ** type respectively. For bearing dimensions, allowable rotations, and mass, please refer to pages **B-88** to **B-94**. 2. " \* " indicates L type collar rings that can also be used with dimension series **22** bearings.

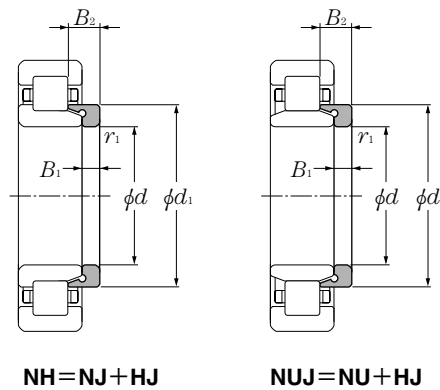

$d$  200 ~ 320mm

	Dimensions					Bearing numbers	Mass kg (approx.)
	mm						
$d$	$d_1$	$B_1$	$B_2$	$r_{1s \min}^{1)}$			
<b>200</b>	259	14	23	4	<b>HJ240E</b>	2.35	
	258	14	34	4	<b>HJ2240</b>	2.99	
	257.8	14	28	4	<b>HJ2240E</b>	2.86	
	280	18	33	5	<b>HJ340</b>	5	
	280	18	44.5	5	<b>HJ2340</b>	5.76	
<b>220</b>	286	15	27.5	4	<b>HJ244</b>	3.55	
	307	20	36	5	<b>HJ344</b>	7.05	
<b>240</b>	313	16	29.5	4	<b>HJ248</b>	4.65	
	335	22	39.5	5	<b>HJ348</b>	8.2	
<b>260</b>	340	18	33	5	<b>HJ252</b>	6.2	
	362	24	43	6	<b>HJ352</b>	11.4	
<b>280</b>	360	18	33	5	<b>HJ256</b>	7.39	
	390	26	46	6	<b>HJ356</b>	13.9	
<b>300</b>	387	20	34.5	5	<b>HJ260</b>	9.14	
<b>320</b>	415	21	37	5	<b>HJ264</b>	11.3	

1) Minimal allowable dimension for chamfer dimension  $r$ . Note: 1. This L type collar ring is used with **NU** type cylindrical roller bearings; in duplex arrangements with **NJ** or **NU** type bearing numbers, they become **NH** type and **NUJ** type respectively. For bearing dimensions, allowable rotations, and mass, please refer to pages **B-94** to **B-97**. 2. " \* " indicates L type collar rings that can also be used with dimension series **22** bearings.